



AUTOBOIL 5 LITRE WHITE

Order Code 405052

Wall mounted instant boiling water appliance with integrates 0.2 micron MicroPurity™ filtration. The Autoboil® employs twin chamber boiling water steam-heat-boost™ technology to recycle energy from steam to pre-heat the incoming cold water. The Autoboil® has inbuilt self-calibration technology, utilises highly accurate electronic temperature control and incorporates a programmable digital display with 2 energy saving modes. The main boiling water tank is wrapped with high performance insulation to ensure the healthiest water and optimum efficiency. The Autoboil® is equipped with an external two-way classic tap.

Manufacturing Code 405052



Water Pressure Min 70kPa - Max 500kPa

Water Connection 12.7mm BSP

Power Rating 2.4kW 220-240 V 50Hz

Dimensions H473mm x W329mm x D201mm



Product Approvals WaterMark, CE

Warranty 2 years

Installation Requirements

1. Must be installed by a suitably qualified person in accordance with manufacturers instructions and with all relevant plumbing and electrical regulations. 2. In some hard water areas where mineral scale accumulation can become a problem, consideration should be given to the maintenance required, adding a high capacity filtration or water softening system should be considered.

Installation Detail

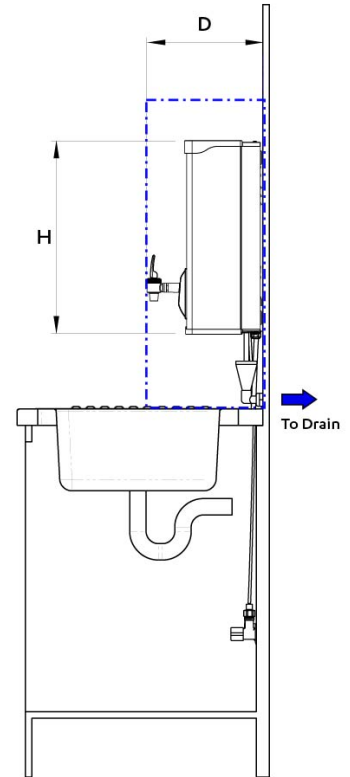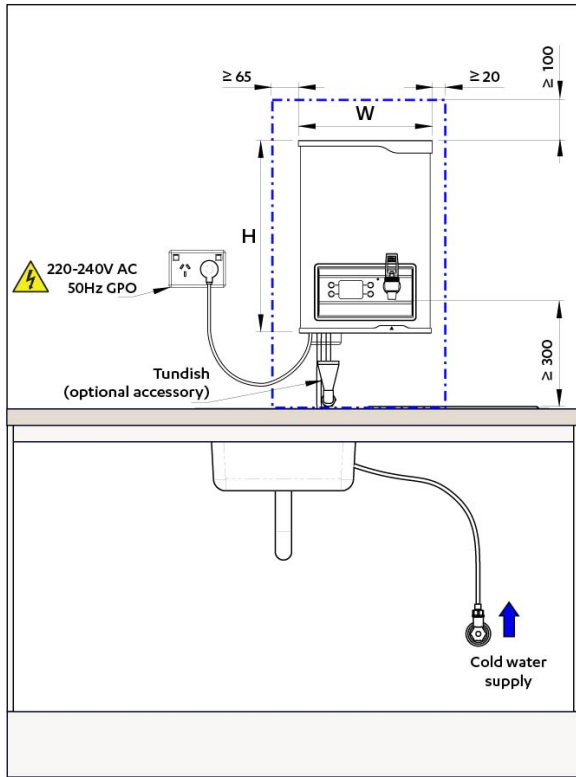

Code (AU)	Code (NZ)	Description	W	D	H
403052	403652	3 Litre AutoBoil	300	280	439
405052	405652	5 Litre AutoBoil	329	298	473
407052	407652	7.5 Litre AutoBoil	329	304	586

SCALE 1:6