



CHILL CH390 UNDER BENCH DIAGRAM

OPTIONAL DUAL COLUMN TAP

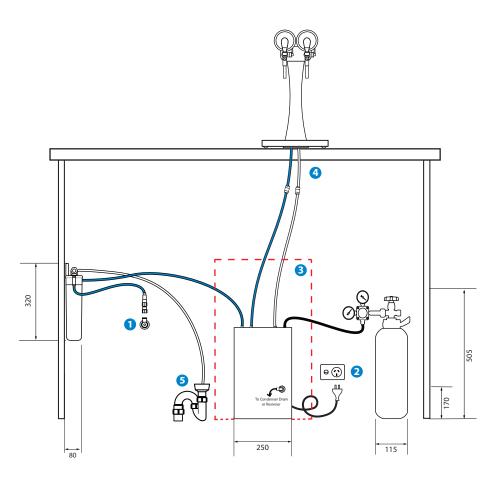

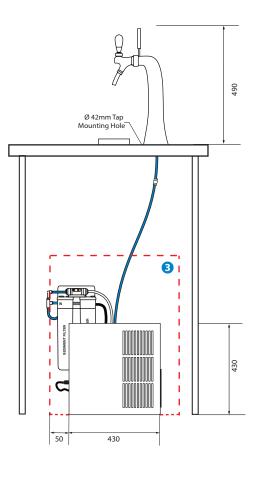

SITE REQUIREMENT

- 1 Mains Cold Water Isoltion Tap
- 2 240V Power Outlet
- **3** Clear Air Envelope. Clearance required around the appliance
- 4 Chilled Water Line to Tap need to be Insulated
- Open Tundish Drain

Please Note: If the appliance is installed in a closed cupboard space, large adequate ventilation is required to validate the warranty

ALL DIMENSIONS GIVEN ARE IN MM.



(07) 3394 4000 sales@streamwater.com.au streamwater.com.au



