

#### Open Under Bench Installation


**Please Note:** If the appliance is installed in a closed cupboard space, large adequate ventilation is required to validate the warranty

### SITE REQUIREMENT

- 1 Drainage 40mm Tundish - Max Height 200mm
- 2 Mains Cold Water Isoltion Tap
- 3 240V Power Outlet

### MODELS

GL1300 = 650H x 410W x 630D  
 GL2000 = 650H x 520W x 750D  
 GL5000 = 1080H x 640W x 660D

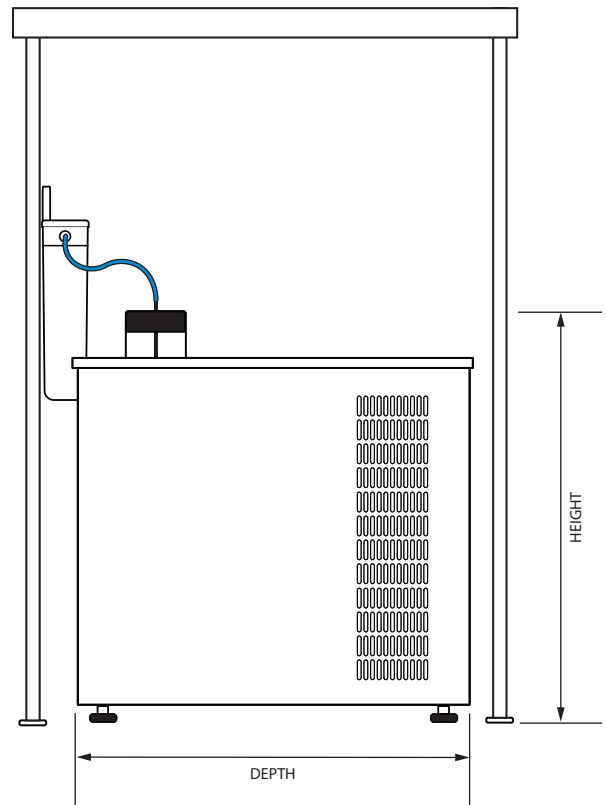

**N.B.** When trimming tubes to length - to ensure NO LEAKS use a sharp tube cutter for a clean cut  
 ALL DIMENSIONS GIVEN ARE IN MM.